



# GETTING TO KNOW YOUR PRODUCT

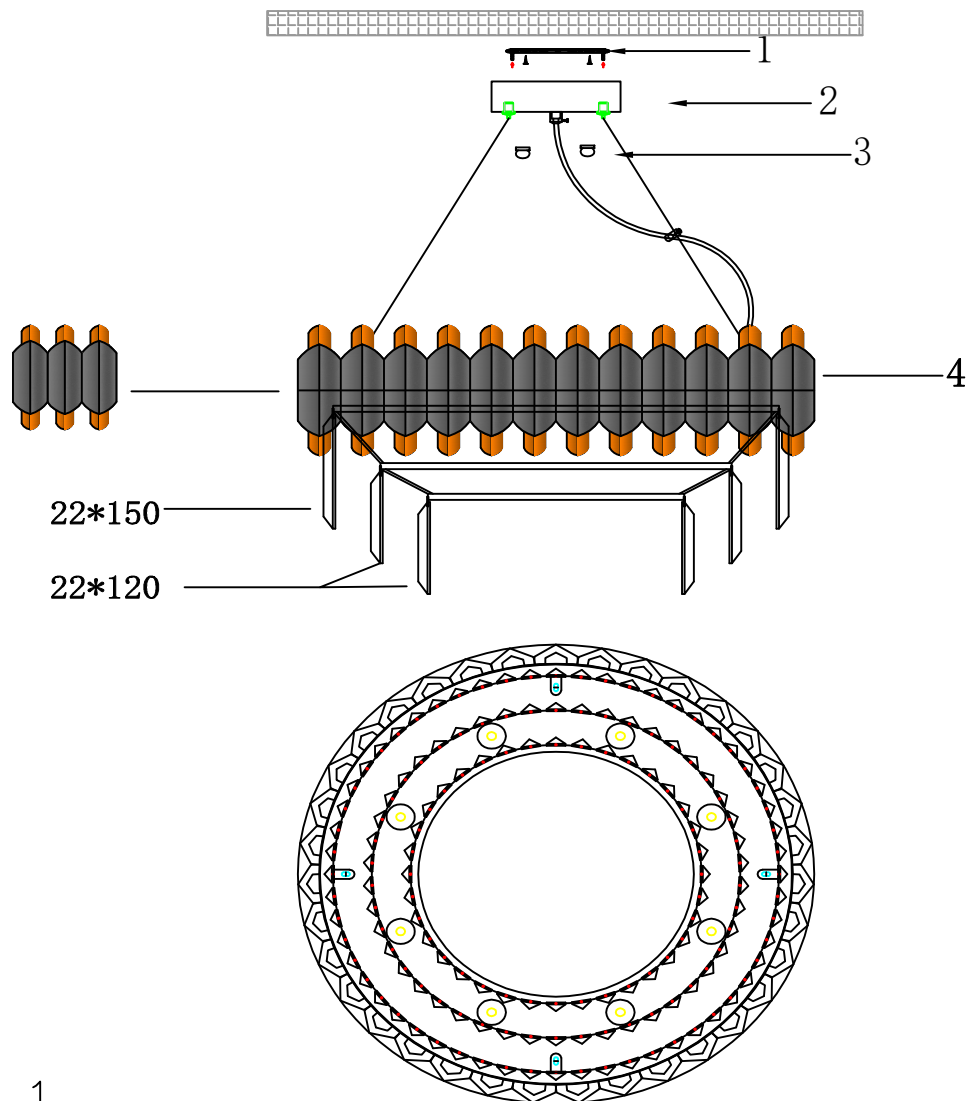

## Step 1

THIS FITTING MUST BE SECURED TO A JOIST OR JOIST BRIDGE.

Taking care not to damage any house wiring, screw fixing bracket to the ceiling using the screw supplied in the accessory pack. The screws should penetrate the ceiling wood joist by at least 20mm.

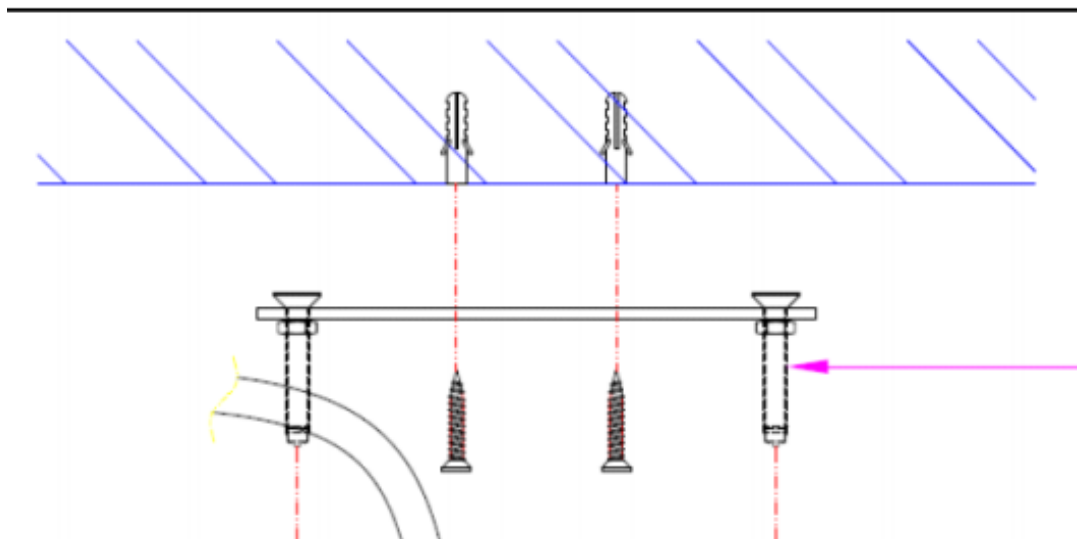


## Step 2

Check that.....


- you have correctly identified the house wires for the light fitting.
- connections are tight.
- no loose strands have been left out of the connection block(s).

Wrap two layers of electrical insulation tape around the connector block and around the wiring on each side of the connector block.

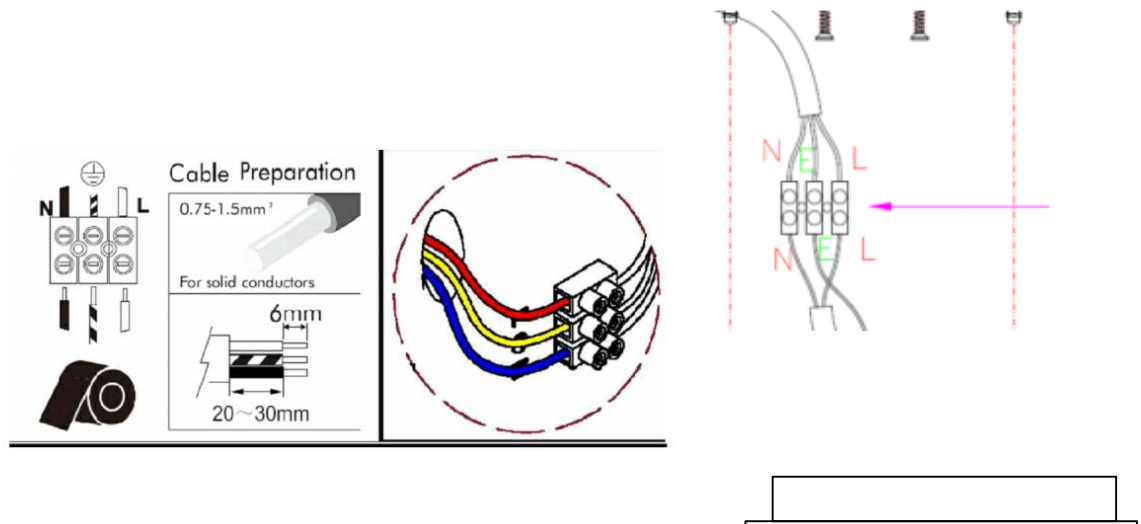

## Step 3



When all connections are insulated, offer the ceiling cup up the fixing bracket. Align the screws with the corresponding slots. Then tighten the screws.

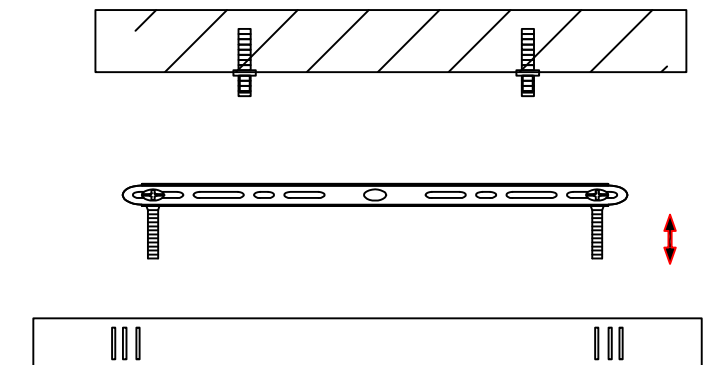

## Step 4

Fit the correct light bulb.

- Max Wattage - 40 Watts
- Bulb shape - Candle
- Bulb Type - E14 (Small Edison Screw)

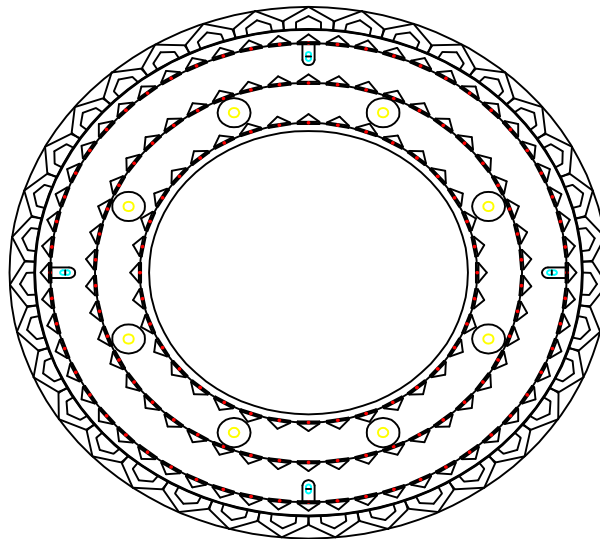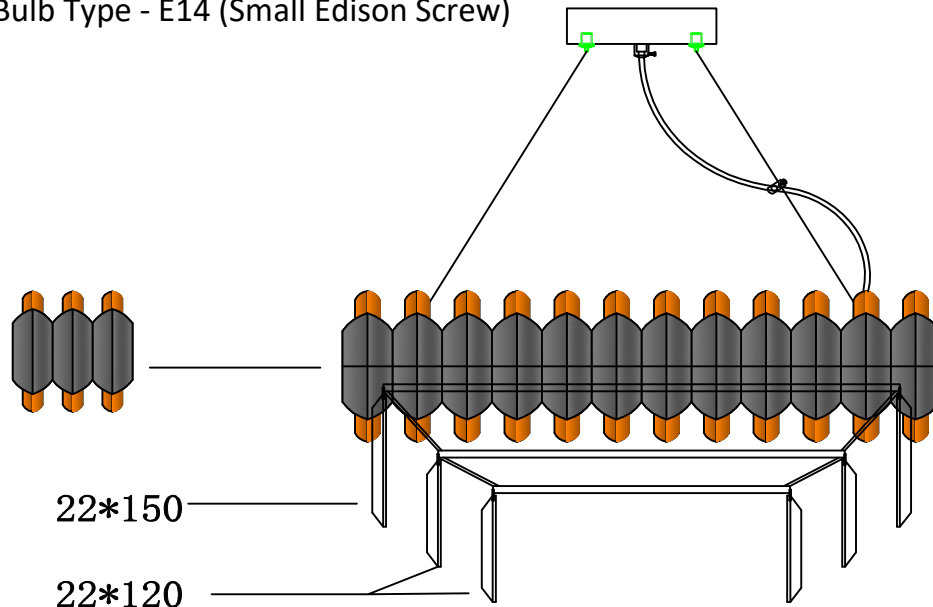

## Switch on!

You may now switch the electricity back on. We are sure you will be pleased with your new WDW light fitting and that it will give you many years of trouble free enjoyment.

## Cleaning care

We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will rub away the protective coating.

## Safety information

For your safety, please remember the following:

Always switch off the supply before changing lightbulbs or cleaning. Allow bulbs to cool down before handling.